

# Large Digit Display – 100mm digit height

## LD-TM universal temperature displays

For temperature from RTD or thermocouple sensor or 4-20mA or DCV/mV

The 100mm digit height LD-TM displays are ideal for applications where temperature needs to be visible from a distance (rated for up to 50 metres). Foundries, smelters, commercial swimming pools, greenhouses, workplaces, coolrooms and chemical processing facilities are just some of the possible applications for these large digit displays.

### Display examples




4 digit 100mm Red LED showing units



4 digit 100mm Red LED

**Mounting brackets** - The 100mm models are shipped with 4 metal brackets and mounting hardware. The diagrams illustrate vertical and horizontal installation of these brackets. If mounting without the brackets then the 9mm dia. case holes provided for the brackets can be used as alternative mounting holes. If the brackets are not used in mounting, then these holes should be sealed against dust and water.

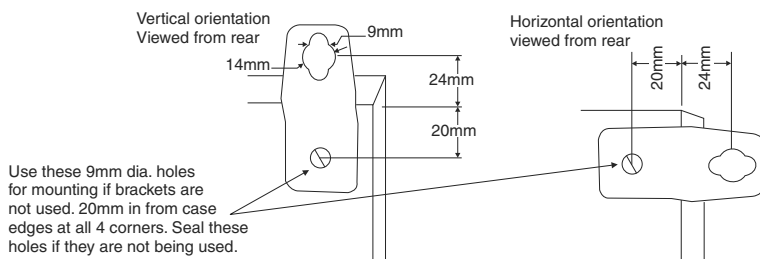

### Features

- Visible from 50 metres
- 4 digit 100mm Red LED
- 6 digit 100mm Red LED
- 4 digit 100mm Yellow Electromagnetic
- 5 digit 100mm Yellow Electromagnetic
- 6 digit 100mm Yellow Electromagnetic
- Input from Pt100 or Pt1000 RTD or Type B, E, J, K, N, R, S or T thermocouple  $\pm 20\text{mV}$ ,  $\pm 50\text{mV}$ ,  $\pm 75\text{mV}$  or  $\pm 200\text{mV}$  4-20mA,  $\pm 2.5\text{VDC}$  or  $\pm 25\text{VDC}$  or slidewire.
- Measurement in Degrees C or Degrees F or Degrees K (absolute)
- Can be configured to show display units i.e.  $^{\circ}\text{C}$  or  $^{\circ}\text{F}$  or  $^{\circ}\text{C}$  or  $^{\circ}\text{F}$
- IP65 rated wall mount enclosure, powder coated steel standard, stainless steel optional
- 4 configurable setpoint relays standard rated at 240VAC, 5A into a resistive load, form C
- Pushbutton setup and calibration
- Remote inputs can be configured to one of a wide range of functions including display switching, display hold, peak hold, etc.
- Programmable digital filter for rate display
- RS232 or RS485 serial communications optionally available
- The auto-brightness feature for LED displays varies the display brightness to suit the ambient light
- 2 year guarantee
- See separate brochures for 38, 45, 57mm and 200mm display models



LDTM100-3.3-0

AMALGAMATED INSTRUMENT CO PTY LTD

ACN: 001 589 439

Unit 5, 28 Leighton Place Hornsby  
NSW 2077 Australia

Telephone: +61 2 9476 2244  
Facsimile: +61 2 9476 2902



e-mail: sales@aicpl.com.au  
Internet: www.aicpl.com.au

## Specifications

Input:	Pt100 or Pt1000 RTD sensors or Type B, E, J, K, N, R, S or T thermocouple or $\pm 20\text{mV}$ , $\pm 50\text{mV}$ , $\pm 75\text{mV}$ or $\pm 200\text{mV}$ or 4-20mA, $\pm 2.5\text{VDC}$ or $\pm 25\text{VDC}$ analog signals or Slidewire 0-1k $\Omega$ to 0-1M $\Omega$
Accuracy:	RTD, 4-20mA, DCV, DCmV & slidewire 0.1% of full scale when calibrated Thermocouples 0.1% of full scale $\pm 1^\circ$
Sample rate:	4-20mA, DCV & DCmV - 4 samples/sec RTD - 2 sample/sec Thermocouple - 1 sample/sec
Microprocessor	MC68HC11 CMOS
Ambient temp	-10°C to 60°C
Humidity	5% to 95%
Display types:	100mm 4 digit red LED 100mm 6 digit red LED 100mm 4 digit yellow electromagnetic (flip digit) 100mm 5 digit yellow electromagnetic (flip digit) 100mm 6 digit yellow electromagnetic (flip digit) See separate brochures for other display sizes
Power supply:	See order code table (type is factory configured)
Power usage:	AC supply 15VA max, DC supply typically 300mA at 24VDC for LED displays (1A peak), typically 1A for electromagnetic displays (4A peak) (plus current for sensor if on board supply is used)
Transmitter supply:	10VDC (50mA max), $\pm 5\text{VDC}$ (25mA max), 24VDC (25mA max) or $\pm 12\text{VDC}$ (25mA max) link selectable
Outputs (standard):	4 x relays, form C, rated at 240VAC, 5A resistive
Outputs (optional):	See order code table (type is factory configured)
Relay action:	Programmable N.O. or N.C.
Environmental rating:	IP65
Weight:	4 digit displays 10.5kg, 5 digit displays 12kg, 6 digit displays 13.5kg
Dimensions:	4 digit displays 450 x 250 x 155mm 5 digit displays 520 x 250 x 155mm 6 digit displays 650 x 250 x 155mm

## Optional shrouds

Shroud kits for 100mm displays consist of 2 side panels, a top plate (length is model dependant) and fixing hardware. The overhang of the shroud is 90mm for all models. The shrouds are of powder coated zinc coated steel to match the metal enclosures.

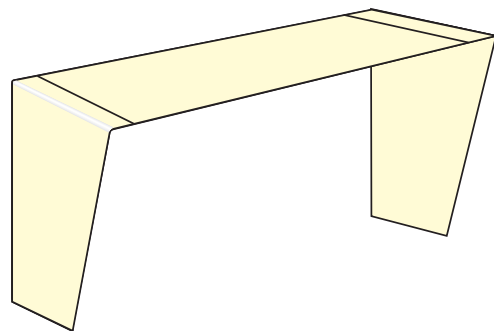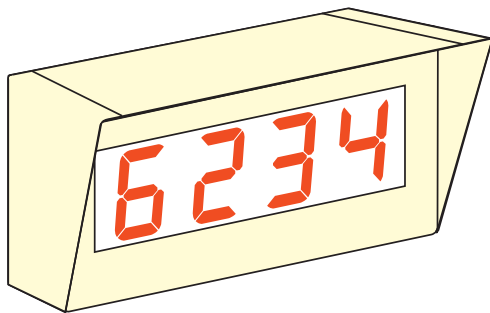


LDTM100-3.3-0

## LD-TM order codes for 100mm displays

The last two sections are for optional items (if required).

Optional outputs are factory configured. Analog outputs cannot be retrofitted.

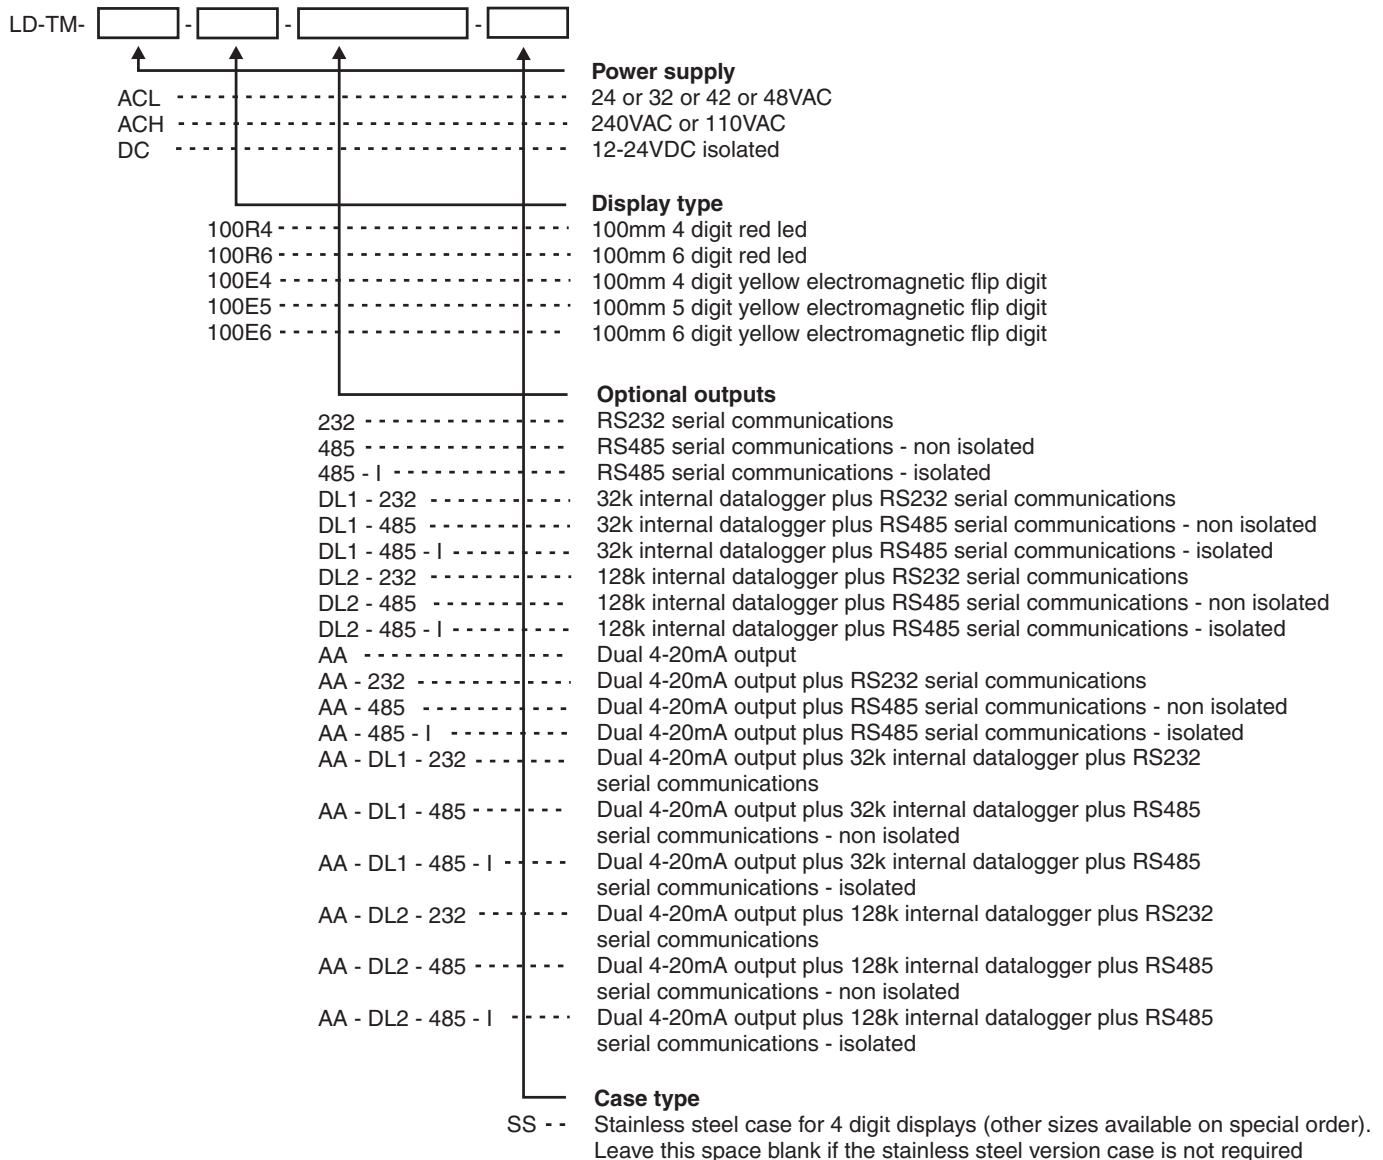

## Applications/input types available with large digit display models

- Analog input, process transmitters etc.  $\pm 20\text{mA}$ , 4-20mA or  $\pm 2.5\text{VDC}$ ,  $\pm 25\text{VDC}$ , slidewire
- Pulse input, rate, total, count, grand total (encoders, switches, proximity sensors etc.)
- Temperature - RTD, thermocouple, 4-20mA
- Weighing - 4 or 6 wire mV/V output loadcells
- Pressure measurement - 4 or 6 wire mV/V pressure sensors or 4-20mA analog transducers
- Liquid level measurement - 4 or 6 wire mV/V pressure sensors or 4-20mA analog transducers
- Serial input - RS232, RS485, Serial current loop for slave displays etc.
- Synchronous Serial Interface (SSI) for high accuracy position etc. measurement
- Binary, BCD or Gray Code input
- Real Time clock with alarms
- Multifunction timer - elapsed time, stopwatch, run time etc.

LDTM100-3.3-0

**AMALGAMATED INSTRUMENT CO PTY LTD**

ACN: 001 589 439

Unit 5, 28 Leighton Place Hornsby  
NSW 2077 Australia

Telephone: +61 2 9476 2244  
Facsimile: +61 2 9476 2902

e-mail: sales@aicpl.com.au  
Internet: www.aicpl.com.au