

12mm pH and ORP electrodes

PH035 & OR035 Series combination laboratory electrodes

- Rugged epoxy body
- Single junction
- Standard 12mm body is ideal for laboratory or installation into process using 12mm adapter
- 1.5 metre low noise RG174/U cable supplied standard with BNC connector

Specifications

pH range:	0 to 14 pH
Temp range:	0 to 60°C
Cable length:	1.5 metre
Connector:	BNC
Wetted materials:	Epoxy & glass (platinum in ORP)
Pressure:	Not suitable for pressurised applications

Order codes:


pH electrode: With 1.5 metre cable	P-PH035SJ1.5MBN
ORP electrode: with 1.5 metre cable	P-OR035SJ1.5MBN

Accessories:

pH Calibration Solutions

4.00 buffer 500ml	PHBUF-4.00-0.5L
7.00 buffer 500mls	PHBUF-7.00-0.5L
10.00 buffer 500mls	PHBUF-10.00-0.5L

Optional BNC to bootlace connection adapter
Electrode connection adapt. P-BNC/BP-100

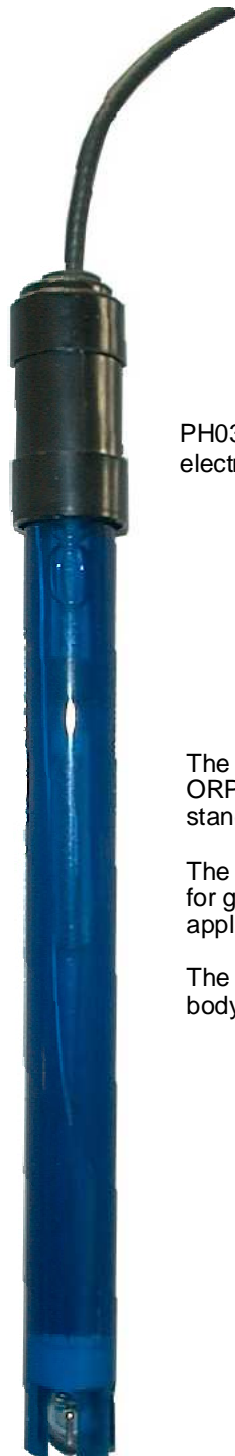

PH035 bulb membrane electrode shown full size

The PH035 pH electrode and OR035 ORP electrode are built to a high quality standard and are surprisingly economical.

The rugged epoxy body electrode is ideal for general laboratory and industrial applications.

The standard 12mm diameter electrode body is universally used in laboratories.

PH035-2.2-0

AMALGAMATED INSTRUMENT CO PTY LTD

ACN: 001 589 439

Unit 5, 28 Leighton Place Hornsby
NSW 2077 AUSTRALIA

Telephone: +61 2 9476 2244
Facsimile: +61 2 9476 2902

e-mail: sales@aicpl.com.au
Internet: www.aicpl.com.au